



**SAFE  
SECURE  
SOLID**



## Double tube bracket with mounting bolt




For fixing galvanized pipes  
PE insulation (thickness 2.5mm)  
Width: 30mm  
Supplied with hanger bolt 100mm or 120mm and nut M8  
Including plug (F10) and cap nut M8

Overview of sizes and weights

Article No	∅ <sub>(mm)</sub>	∅ <sub>(")</sub>	⊗ M	LA (mm)	HA (mm)	B	📦
40000751	15		M8	100	42	30	50
40000752	18	3/8"	M8	100	42	30	50
40000753	22	1/2"	M8	100	52	30	50
40000755	28	3/4"	M8	100	60	30	50
40000754	35	1"	M8	100	65	30	50
40002076	45	1-1/4"	M8	100	75	30	50
40002170	51	1-1/2"	M8	100	80	30	50
40000166	15		M8	120	42	30	50
40000167	18	3/8"	M8	120	42	30	50
40000744	22	1/2"	M8	120	52	30	50
40000745	28	3/4"	M8	120	60	30	50
40000746	35	1"	M8	120	65	30	50
40000747	45	1-1/4"	M8	120	75	30	50
40000756	15		M8	100	60	30	50
40004589	18	3/8"	M8	100	60	30	50
40000757	22	1/2"	M8	100	60	30	50
40000748	15		M8	120	60	30	50
40000749	18	3/8"	M8	120	60	30	50
40000750	22	1/2"	M8	120	60	30	50

Technical drawing

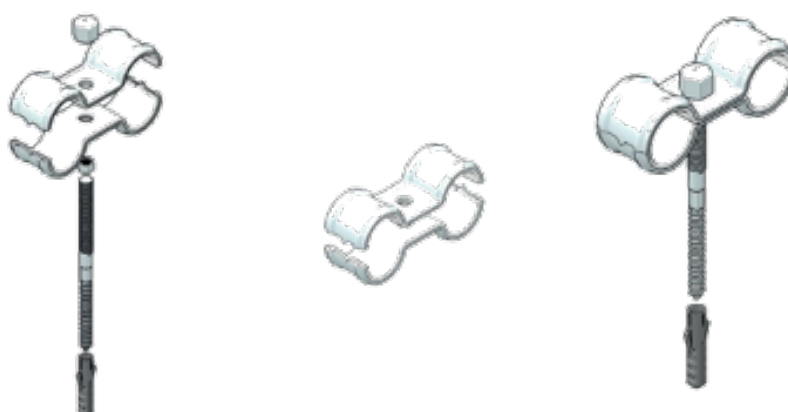

**SAFE  
SECURE  
SOLID**




## Dubbele buisbeugel met montagebout

Voor de bevestiging van gegalvaniseerde buizen  
PE-isolatie (dikte 2,5mm)  
Breedte: 30mm  
Geleverd met stokschroef 100mm of 120mm en moer M8  
Inclusief plug (F10) en dopmoer M8

Overzicht maten en gewichten

Artikel nr.	Ø <sub>(mm)</sub>	Ø <sub>(")</sub>	Ø M	LA (mm)	HA (mm)	B	
40000751	15		M8	100	42	30	50
40000752	18	3/8"	M8	100	42	30	50
40000753	22	1/2"	M8	100	52	30	50
40000755	28	3/4"	M8	100	60	30	50
40000754	35	1"	M8	100	65	30	50
40002076	45	1-1/4"	M8	100	75	30	50
40002170	51	1-1/2"	M8	100	80	30	50
40000166	15		M8	120	42	30	50
40000167	18	3/8"	M8	120	42	30	50
40000744	22	1/2"	M8	120	52	30	50
40000745	28	3/4"	M8	120	60	30	50
40000746	35	1"	M8	120	65	30	50
40000747	45	1-1/4"	M8	120	75	30	50
40000756	15		M8	100	60	30	50
40004589	18	3/8"	M8	100	60	30	50
40000757	22	1/2"	M8	100	60	30	50
40000748	15		M8	120	60	30	50
40000749	18	3/8"	M8	120	60	30	50
40000750	22	1/2"	M8	120	60	30	50

Technische tekening

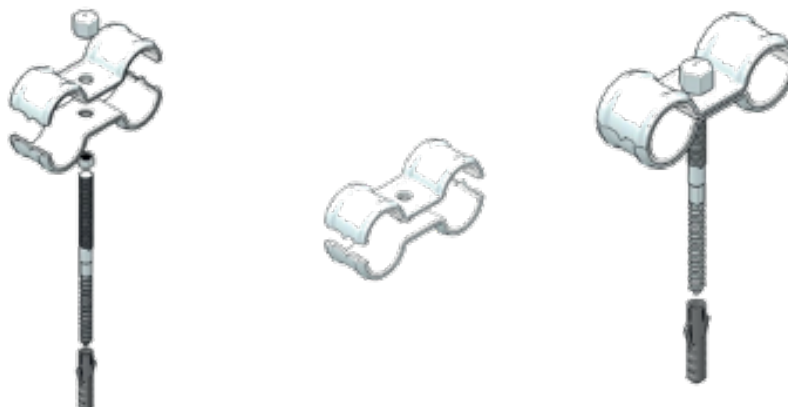

**SAFE  
SECURE  
SOLID**



## Collier double avec jeu de fixation



Pour la fixation de tuyaux galvanisés  
Insonorisation PE (épaisseur 2,5mm)

Largeur: 30mm


Livré avec goujons double filet 100mm ou 120mm et écrou M8

Incl. cheville nylon (F10) et écrou borgne M8

Liste d'articles

N° d'art.	∅ <sub>(mm)</sub>	∅ <sub>(")</sub>	M	LA (mm)	HA (mm)	E	
40000751	15		M8	100	42	30	50
40000752	18	3/8"	M8	100	42	30	50
40000753	22	1/2"	M8	100	52	30	50
40000755	28	3/4"	M8	100	60	30	50
40000754	35	1"	M8	100	65	30	50
40002076	45	1-1/4"	M8	100	75	30	50
40002170	51	1-1/2"	M8	100	80	30	50
40000166	15		M8	120	42	30	50
40000167	18	3/8"	M8	120	42	30	50
40000744	22	1/2"	M8	120	52	30	50
40000745	28	3/4"	M8	120	60	30	50
40000746	35	1"	M8	120	65	30	50
40000747	45	1-1/4"	M8	120	75	30	50
40000756	15		M8	100	60	30	50
40004589	18	3/8"	M8	100	60	30	50
40000757	22	1/2"	M8	100	60	30	50
40000748	15		M8	120	60	30	50
40000749	18	3/8"	M8	120	60	30	50
40000750	22	1/2"	M8	120	60	30	50

Dessin technique

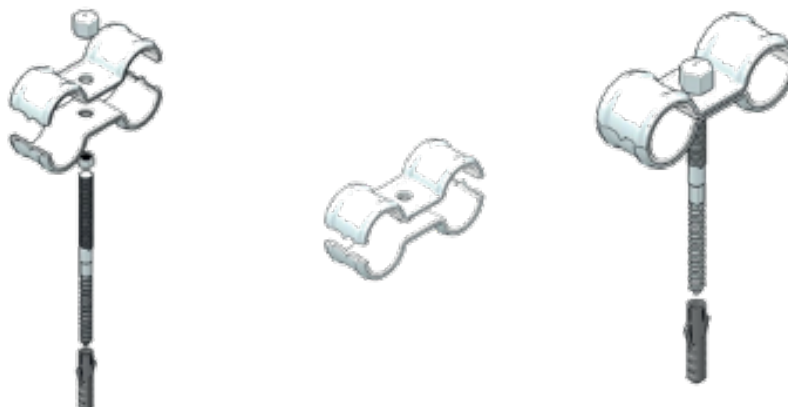

**SAFE  
SECURE  
SOLID**



## Uchwyt z podwójną rurą ze śrubą ontażową

Do mocowania rur ocynkowanych  
Izolacja PE (grubość 2,5 mm)  
Szerokość: 30 mm  
Dostarczane ze śrubą wieszakową 100mm lub 120mm i nakrętką M8  
W tym korek (F10) i nakrętka kołpakowa M8

Przegląd rozmiarów i wag

Numer artykułu	Ø <sub>(mm)</sub>	Ø <sub>(")</sub>	Ø M	LA (mm)	HA (mm)	B	
40000751	15		M8	100	42	30	50
40000752	18	3/8"	M8	100	42	30	50
40000753	22	1/2"	M8	100	52	30	50
40000755	28	3/4"	M8	100	60	30	50
40000754	35	1"	M8	100	65	30	50
40002076	45	1-1/4"	M8	100	75	30	50
40002170	51	1-1/2"	M8	100	80	30	50
40000166	15		M8	120	42	30	50
40000167	18	3/8"	M8	120	42	30	50
40000744	22	1/2"	M8	120	52	30	50
40000745	28	3/4"	M8	120	60	30	50
40000746	35	1"	M8	120	65	30	50
40000747	45	1-1/4"	M8	120	75	30	50
40000756	15		M8	100	60	30	50
40004589	18	3/8"	M8	100	60	30	50
40000757	22	1/2"	M8	100	60	30	50
40000748	15		M8	120	60	30	50
40000749	18	3/8"	M8	120	60	30	50
40000750	22	1/2"	M8	120	60	30	50

Rysunek techniczny

